

GeoPump

Ground Water Pumping Solutions

CONTROLLER ACCESSORIES


Controller Manifold: The Controller Manifold, with quick exhaust valve, is used in single controller, multiple well systems to distribute the air signal uniformly to satellite controllers. The aluminum manifold plugs directly into the primary cycle controller.

- Four individual models to accommodate 2, 3, 4, or 5 satellite controllers.
- Push in tube fittings for attachment of 1/4" O.D. "logic" tubing to open and close satellite controllers per primary controller timer settings.
- Integrated, Teflon[®] coated, quick exhaust valve to vent the "logic" tubing to facilitate closing of the satellite controller pilot valve.

Airline Assembly: Required for single controller, single pump applications, the Model 50090 Airline Assembly attaches directly to the primary cycle controller.

- 10' of 3/8" I.D. x 5/8" O.D. industrial air hose.
- Quick connect fitting, attaching to the well closure, for delivery of drive air to the downwell pump.
- Teflon[®] coated, quick exhaust valve for venting of air from the downwell pump, enabling rapid refill.

Teflon is a registered trademark of E.I. duPont.

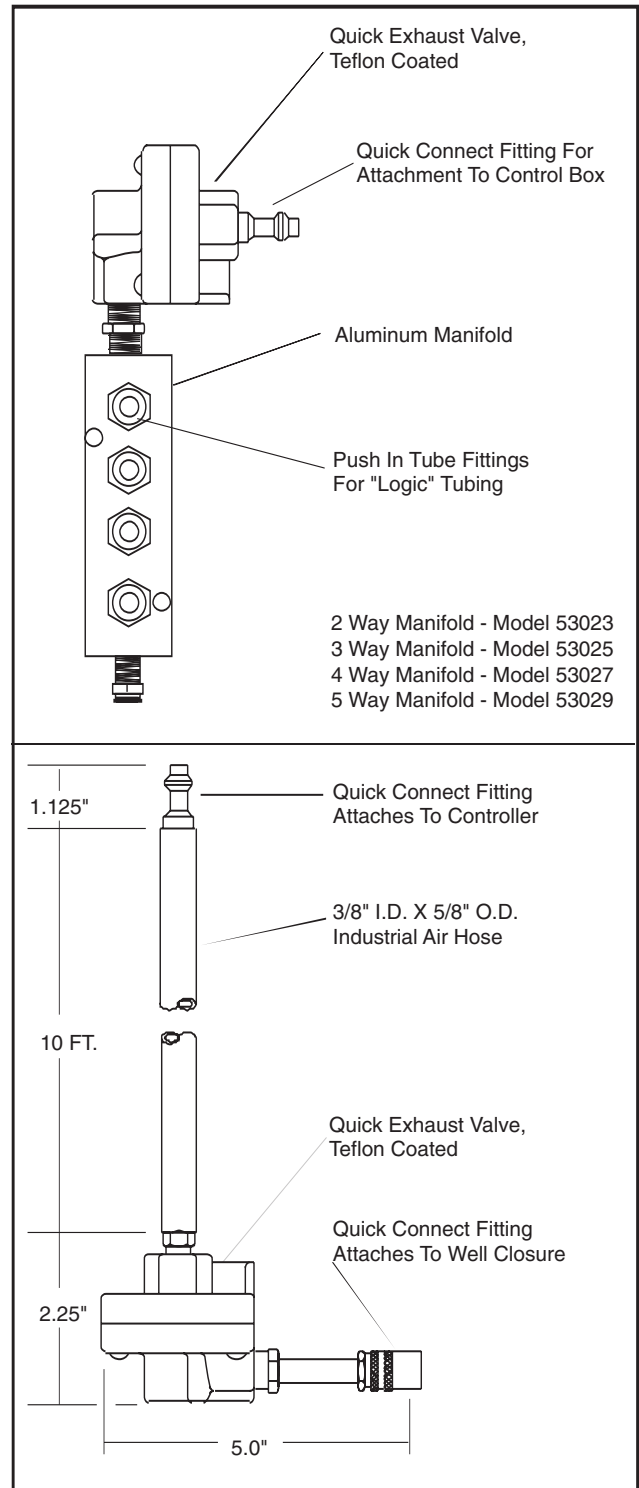

• **GeoPump, Inc.** • 213 State Street • Medina, NY 14103 • www.geopump.com •
• Toll Free 877-Geo-Pump • 585-798-6666 Outside USA • 585-798-0175 Fax •