

# GeoPump

Ground Water Pumping Solutions


## WELL CLOSURES

GEOPUMP Well Closures provide a means of terminating dedicated tubing to the well head, supporting the pump, and housing the air and liquid discharge fittings. The standard closure is a non-lockable flat cap, recommended where recovery wells are underground vaults or protective closures.

- Durable, Type 1 PVC construction.
- Non-corroding, quick-connect fitting on the top of the closure for attachment of an airline assembly, or satellite controller.
- Non-corroding, push-in tube connector on underside of the closure for attachment of the pump air line.
- Polypropylene compression tube connector for attachment of the pump liquid discharge tube.
- Polypropylene bubbler tube pass through fitting included if on/off level control is required.

### Design Notes:

- Refer to drawing to insure adequate clearance between the top of the well casing and the lid of the well vault.
- Consult the factory for assistance with 10" or larger wells, or other special well head terminations.

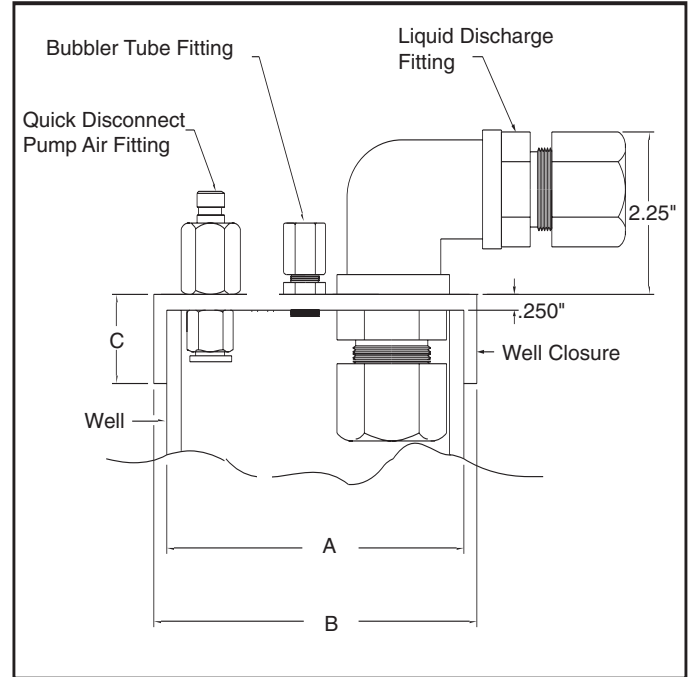

WELL SIZE	MODEL	A(in.)	B(in.)	C(in.)
2"	5870R	2.38	2.70	1.80
3"	5494R	3.50	4.00	1.85
4"	5422R	4.50	5.00	2.30
5"	5708R	5.62	6.12	3.25
6"	5442R	6.62	7.25	3.35
8"	5453R	8.62	9.25	3.75

• **GeoPump, Inc.** • 213 State Street • Medina, NY 14103 • [www.geopump.com](http://www.geopump.com) •  
 • Toll Free 877-Geo-Pump • 585-798-6666 Outside USA • 585-798-0175 Fax •